




370W PERC Module

JAM72S01 350-370/PR Series

Introduction

Powered by high-efficiency PERCIUM cells, this series of high-performance modules provides the most cost-effective solution for lowering the LCOE of any PV systems large or small.

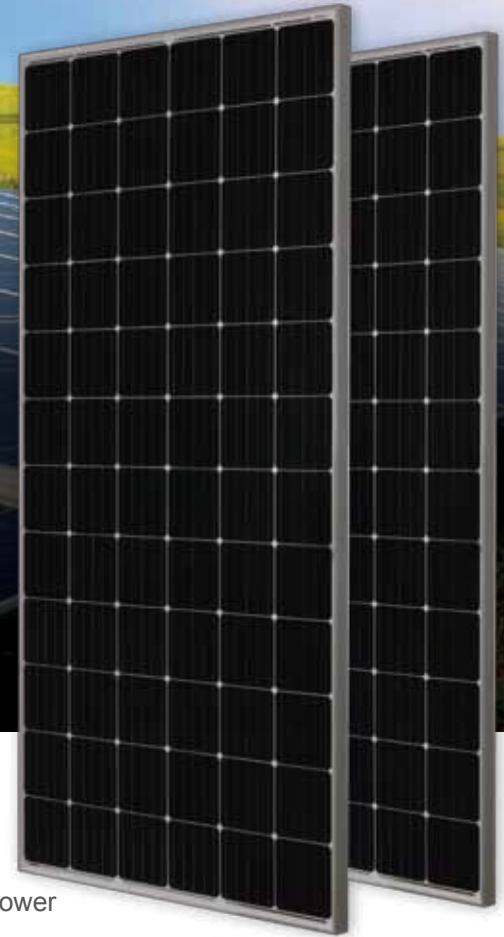

5 busbar solar cell design



Higher output power




Excellent low-light performance



Lower temperature coefficient

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

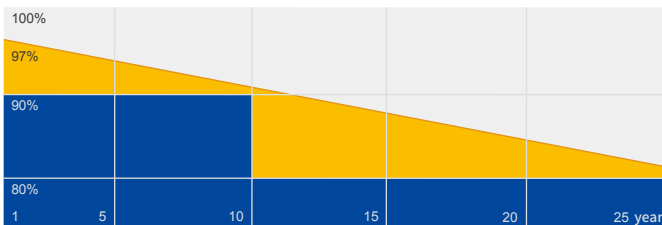


■ JA Linear Power Warranty ■ Industry Warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 1703, IEC TS 62804, IEC 61701, IEC 62716, IEC 60068-2-68
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

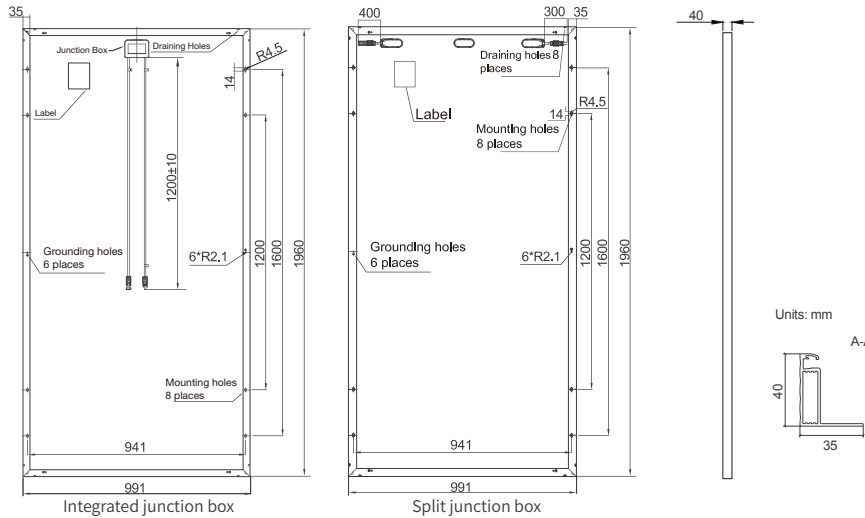

SPECIFICATIONS

Cell	Mono
Weight	22kg±3%
Dimensions	1960mm×991mm×40mm
Cable Cross Section Size	4mm ²
No. of cells	72(6x12)
Junction Box	IP67, 3 diodes
Connector	MC4 Compatible(1000V) QC 4.10-35(1500V)
Packaging Configuration	27 Per Pallet

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S01 -350/PR	JAM72S01 -355/PR	JAM72S01 -360/PR	JAM72S01 -365/PR	JAM72S01 -370/PR
Rated Maximum Power(Pmax) [W]	350	355	360	365	370
Open Circuit Voltage(Voc) [V]	47.24	47.45	47.66	47.93	48.18
Maximum Power Voltage(Vmp) [V]	38.58	38.76	38.96	39.21	39.45
Short Circuit Current(Isc) [A]	9.61	9.69	9.81	9.85	9.91
Maximum Power Current(Imp) [A]	9.07	9.16	9.24	9.31	9.38
Module Efficiency [%]	18.0	18.3	18.5	18.8	19.0
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α _{Isc})	+0.060%/°C				
Temperature Coefficient of Voc(β _{Voc})	-0.300%/°C				
Temperature Coefficient of Pmax(γ _{Pmp})	-0.380%/°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM72S01 -350/PR	JAM72S01 -355/PR	JAM72S01 -360/PR	JAM72S01 -365/PR	JAM72S01 -370/PR
Rated Max Power(Pmax) [W]	257	261	265	268	272
Open Circuit Voltage(Voc) [V]	43.68	43.88	44.10	44.33	44.55
Max Power Voltage(Vmp) [V]	35.78	35.81	36.03	36.25	36.50
Short Circuit Current(Isc) [A]	7.61	7.68	7.74	7.80	7.86
Max Power Current(Imp) [A]	7.19	7.29	7.34	7.40	7.45
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G				

OPERATING CONDITIONS


Maximum System Voltage	1000V/1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front	5400Pa
Maximum Static Load,Back	2400Pa
NOCT	45±2°C
Application Class	Class A

CHARACTERISTICS

Current-Voltage Curve JAM72S01-355/PR



Power-Voltage Curve JAM72S01-355/PR



Current-Voltage Curve JAM72S01-355/PR

